





OPTION "B"
NEMA "B" BRACKET

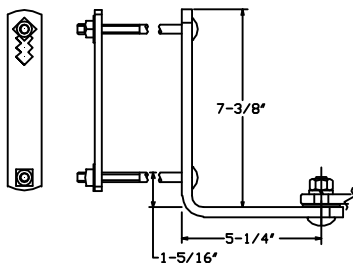


OPTION "X"
EXTENDED BRACKET

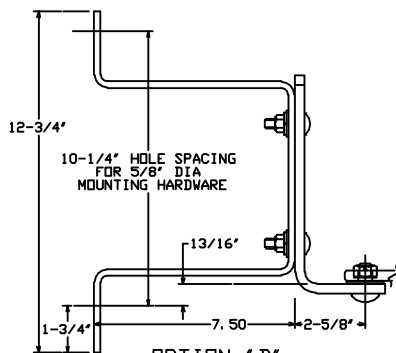


OPTION "D"
"D" BRACKET

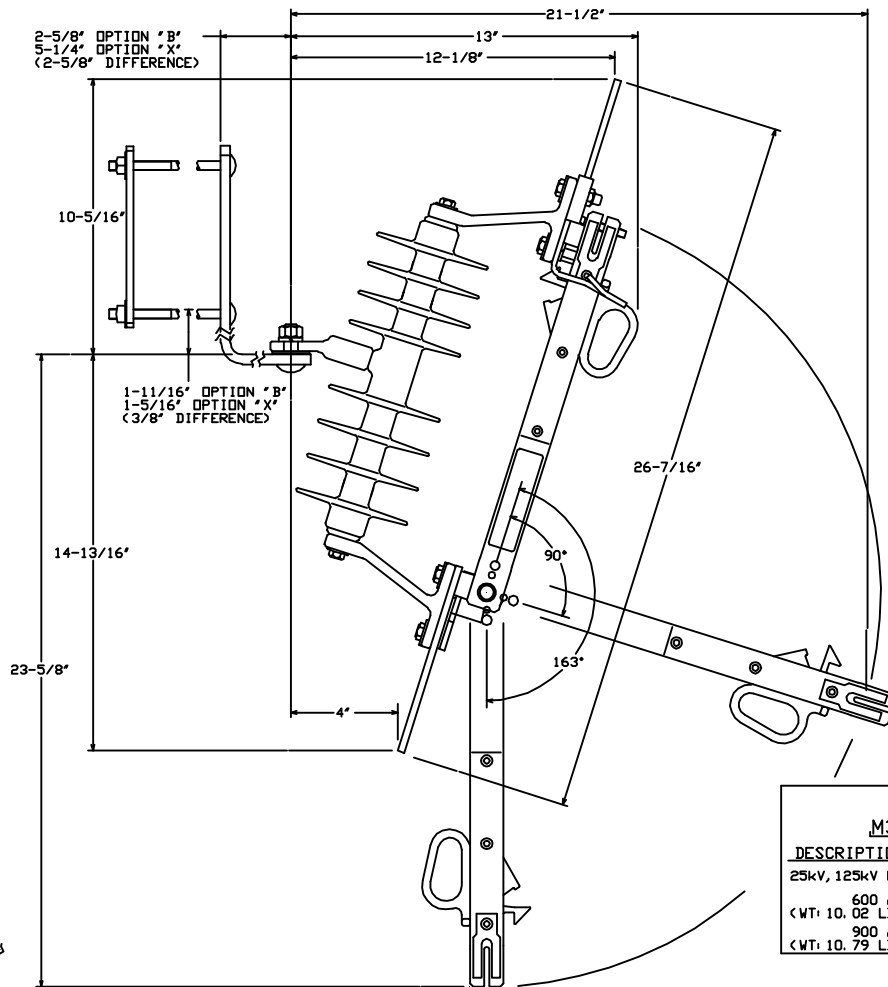

OPTION "P"
PARALLEL GROOVE TERMINALS
CONSIST OF 2 EACH CONNECTORS & HARDWARE
FOR #2-500 KCMIL COPPER OR ALUMINUM CONDUCTOR



OPTION "C"
CAPTIVE HARDWARE
CONSIST OF 4 EACH: 1/2" STAINLESS
STEEL BOLTS, LOCKWASHERS, & NUTS



TERMINAL PADS DETAIL

CARTON INFORMATION			
LENGTH	WIDTH	HEIGHT	WEIGHT
25-1/2"	14"	6"	2 LBS

CATALOG NUMBERING SYSTEM	
M3C25-□□□□	
DESCRIPTION	OPTIONS
25kV, 125kV LIW	B-NEMA "B" MOUNTING BRACKET (WT=2.86 LBS)
600 AMP	C-CAPTIVE HARDWARE (WT=.68 LBS)
<WT: 10.02 LBS>	D-NEMA "D" MOUNTING BRACKET (WT=3.48 LBS)
900 AMP	P-PARALLEL GROOVE TERMINALS (WT=2.15 LBS)
<WT: 10.79 LBS>	X-EXTENDED MOUNTING BRACKET (WT=3.67 LBS)

CHANCE
TOLERANCE CHART
EC 18021

HUBBELL POWER SYSTEMS	
TITLE	1- INSUL DISC SW (25KV)
SIZE	1/4" / 3/8" / 1/2" / 5/8" / 3/4" / 1"
D	SA-M3C25
SEE CHART	SEE CHART
DO NOT SCALE THIS DRAWING	OWN BY ROBERT DATE 04-27-06 SHEET 01 OF 01