


Polecrete®

STABILIZER

**2-part Post Setting Foam
for Faster and Stronger Results**

*The original
polyurethane
backfill solution.*



Polecrete® STABILIZER



FAST Mixes in 30 seconds, sets in 15 minutes.
STRONG More holding strength than other options.
PORTABLE Lightweight and easy to carry.

Polecrete Stabilizer is a two-part structural foam that comes in lightweight, easy-to-carry kits. Just mix the two liquid chemicals and pour into the hole. The foam expands up to 15 times its original volume and compacts the soil around the pole for stronger holding strength, more uplift resistance and improved safety. In just 15 minutes, the foam is set.

Key Advantages

- Reduces costs due to labor efficiency
- Eliminates hauling rock and tamping
- Ideal in sand, rock and poor soil conditions
- Prevents ground line wood pole decay
- Field proven with major utilities since 1988
- Works year-round in any temperature
- Classified non-hazardous by EPA and DOT



Works with all pole types:

- Wood
- Composite
- Metal
- Concrete

Works in many industries:

- Utility
- Cellular
- Lighting
- Solar





The speed and strength of **Polecrete Stabilizer** helps to quickly restore power.

| TYPICAL PHYSICAL PROPERTIES | | | |
|-------------------------------------|-------------------|-------------------|-------------------|
| | STANDARD | HD | HYDRO |
| Free Rise Core Density (ASTM D1622) | 4.0 pcf \pm 0.2 | 7.4 pcf \pm 0.2 | 5.0 pcf \pm 0.2 |
| Compressive Strength (ASTM D1621) | \geq 80 psi | \geq 150 psi | \geq 80 psi |
| Flexural Strength (ASTM C203) | \geq 90 psi | \geq 150 psi | \geq 168 psi |
| Tensile Strength (ASTM D1623) | \geq 90 psi | \geq 150 psi | \geq 90 psi |
| Water Absorption (ASTM D2842) | < 2% volume | < 2% volume | < 2% volume |
| Set Time (@77°F) | 15 minutes | 15 minutes | 15 minutes |

| PACKAGING | | |
|------------------------------|----------------|-------------|
| KIT SIZES (approx. yield) | WEIGHT PER KIT | KITS/PALLET |
| 2.5 Cubic Feet | 12.0 lb. | 80 |
| 3.75 Cubic Feet | 16.5 lb. | 80 |
| 5 Cubic Feet | 22 lb. | 80 |
| 6 Cubic Feet | 33.8 lb. | 42 |
| 7 Cubic Feet | 41.6 lb. | 41 |
| 10 Cubic Feet | 45 lb. | 24 |



BMK Product Family

Polecrete®
STABILIZER


Polecrete®
RSP
Wooden Pole Damage Repair

Postloc®
Post Setting Foam


PADcrete™
Pad Leveling Foam

RSP™
Concrete / Asphalt Repair

Watch Polecrete Stabilizer in action!

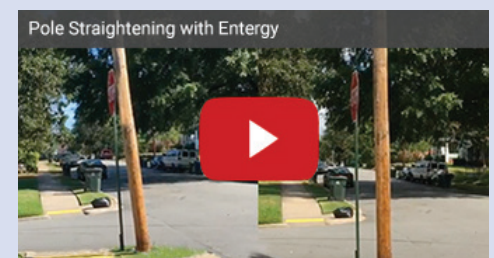

Professional crews using BMK products.

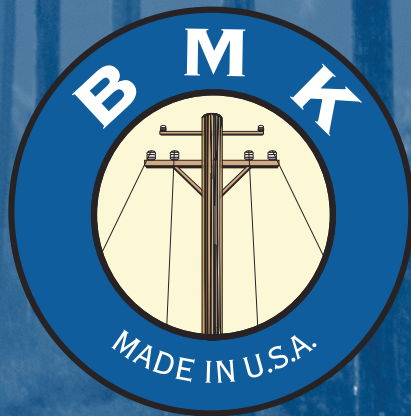

www.bmkproducts.com

888-290-7807