


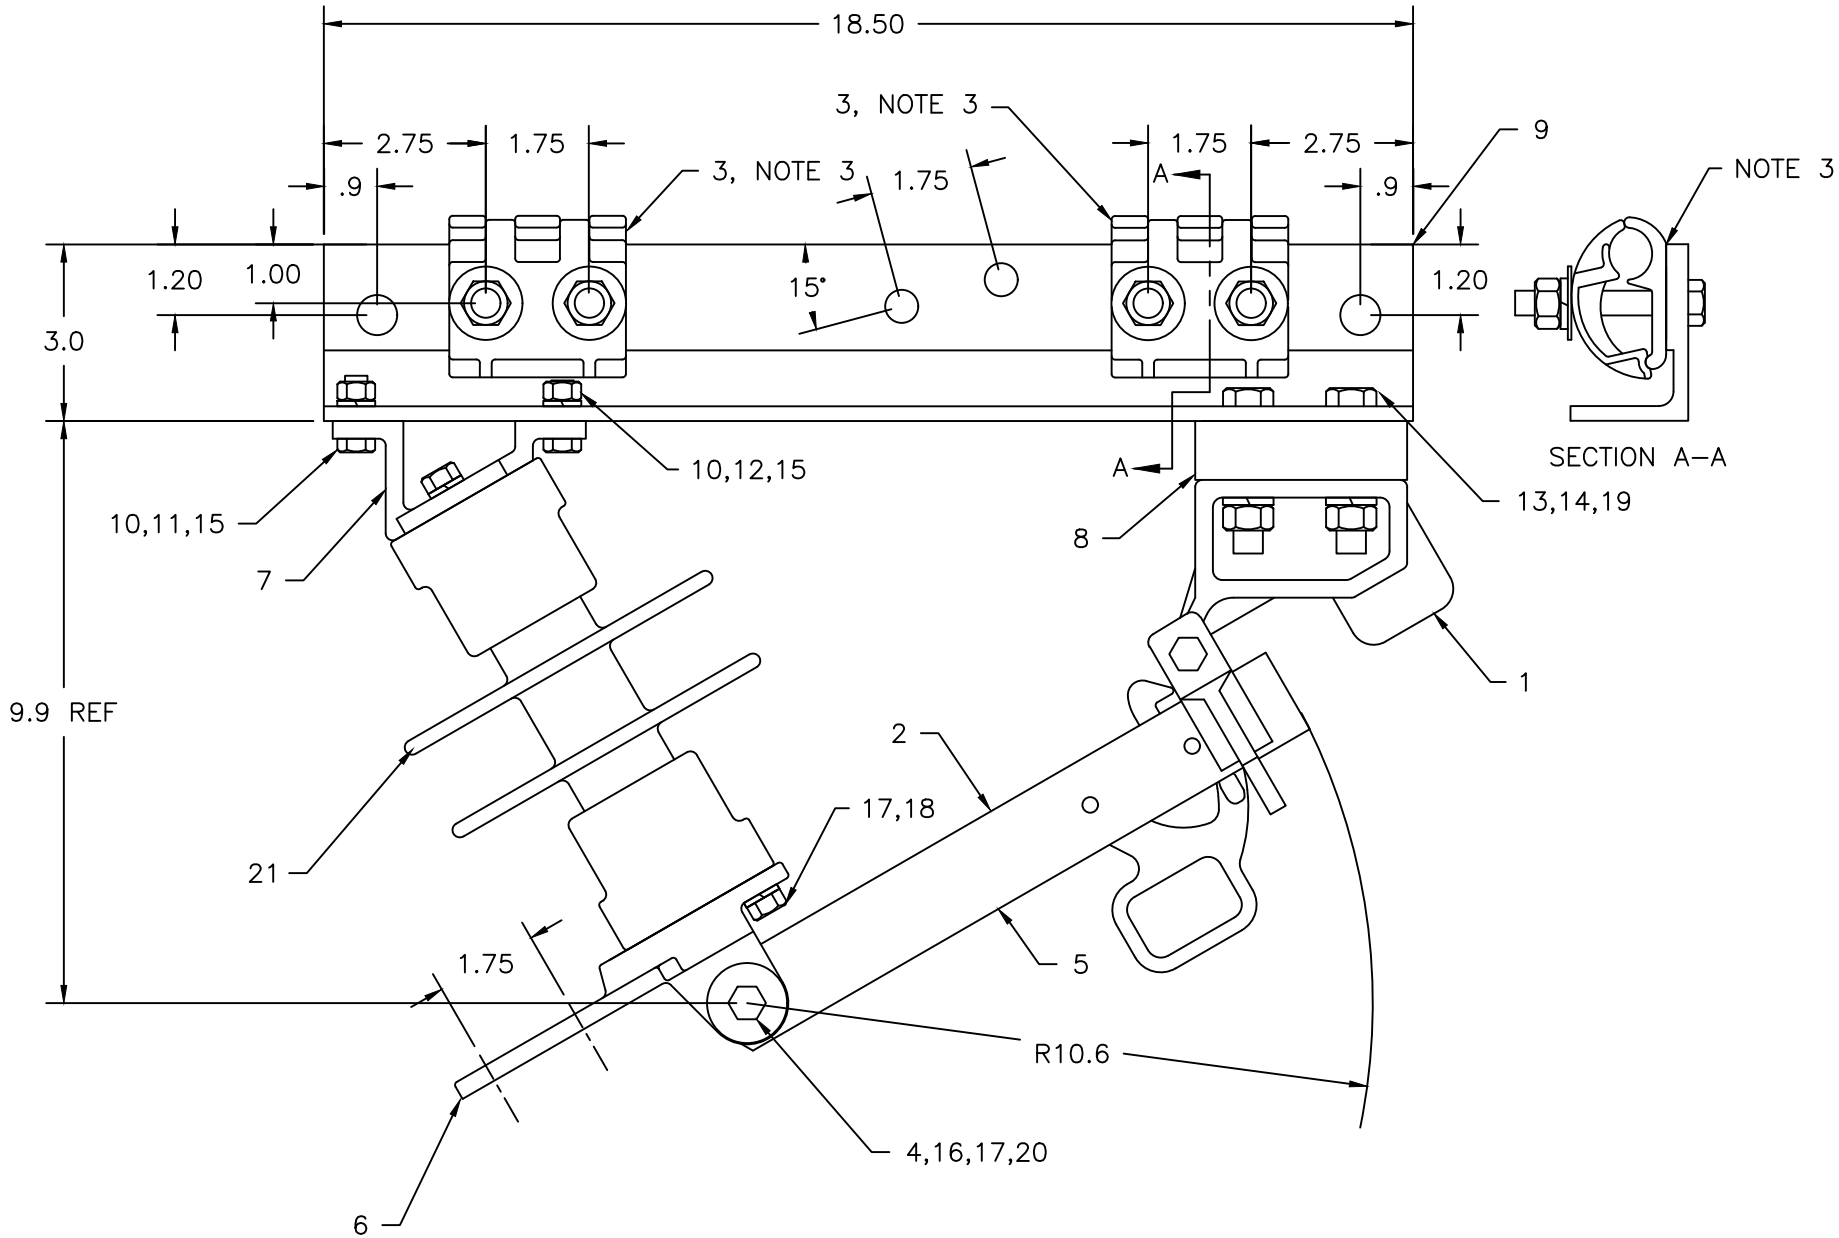

RATING DATA	
CAT. NO.	LER264P-03
MAXIMUM kV	15
kV BIL	110
CONTINUOUS, AMPS	600
MOMENTARY, AMPS	40,000
SWITCH WEIGHT	19 LBS

1	5174-10	24		PKG, ROLL UP FILLER PAD
2	5174-09	23		PKG INSERT, TOP AND BOTTOM
1	4917-06	22		CARTON

PACKING

1	8565	21		INSULATOR
1	8340	20	S.S.	H.H.F.M.B. 3/8-16 x 3
2	8330	19	S.S.	H.H.F.M.B. 1/2-13 x 2-1/2
4	8315	18	S.S.	H.H.F.M.B. 3/8-16 x 1
5	8310	17	S.S.	S.L.W. 3/8
1	8309	16	S.S.	F.H.N. 3/8-16
2	8136	15	G.S.	F.H.N. 3/8-16
2	8120	14	S.S.	S.L.W. 1/2
2	8119	13	S.S.	F.H.N. 1/2-13
1	8105	12	G.S.	H.H.F.M.B. 3/8-16 X 1
1	8104	11	G.S.	H.H.F.M.B. 3/8-16 X 1-1/4
2	8037	10	G.S.	S.L.W. 3/8
1	4406-05	9		BASE
1	4402	8		BLOCK
1	M4397	7		SUB BASE
1	P4334T	6		HINGE TERMINAL
1	4200	5		NAMEPLATE
1	4051	4		SPRING WASHER
2	2438	3		TERMINAL ASSEMBLY
1	2451A-2N-1135	2		BLADE ASSEMBLY
1	2447	1		JAW ASSEMBLY

QTY	PART NO.	ITEM	MATERIAL	DESCRIPTION
LER264P-03	SIEMENS			TITLE TYPE LER SWITCH
	DRN.	DD	TOLERANCES UNLESS SPECIFIED .X .06 FRAC.±1/16 .XX .03 ANGLE±2° .XXX .005	MATERIAL
	DATE 9/28/10	APP. WH		FINISH
	DATE 9/28/10		CASTING DRAFT 3°	
	SCALE: 1/3		SURFACE FINISH 125√	B- LER264P-03

NOTES:

- GRIND OR WIRE BRUSH ALL CONTACT SURFACES BETWEEN JAW ASSEMBLY PN2447, BLOCK PN4402, AND BASE PN4406-05 AND COAT WITH E.J.C. #2.
- LUBRICATE HINGE TERMINAL PNP4334T CONTACT SURFACES AND SILVER CONTACTS IN JAW ASSEMBLY PN2447 WITH DOW CORNING FS-1292 GREASE.
- GRIND OR WIRE BRUSH CONTACT SURFACES BETWEEN TERMINAL ASSEMBLY PN2438 AND BASE PN4406-05 AND COAT WITH E.J.C. #2.

D	4/1/22	2451A-2N-1123 IS NOW 2451A-2N-1135	MP	CJ	RESTRICTED USE: THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF SIEMENS INDUSTRY, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF SIEMENS INDUSTRY, INC. IS PROHIBITED. EXCEPT THAT THE CUSTOMER MAY MAKE COPIES FOR USE SOLELY IN THE INSTALLATION, MAINTENANCE, AND OPERATION OF PRODUCTS SUPPLIED BY SIEMENS INDUSTRY, INC. 99 BOLTON SULLIVAN DR. HEBER SPRINGS AR 72543 USA PH 501-362-8296
NO.	DATE	DESCRIPTION	BY	APP.	