
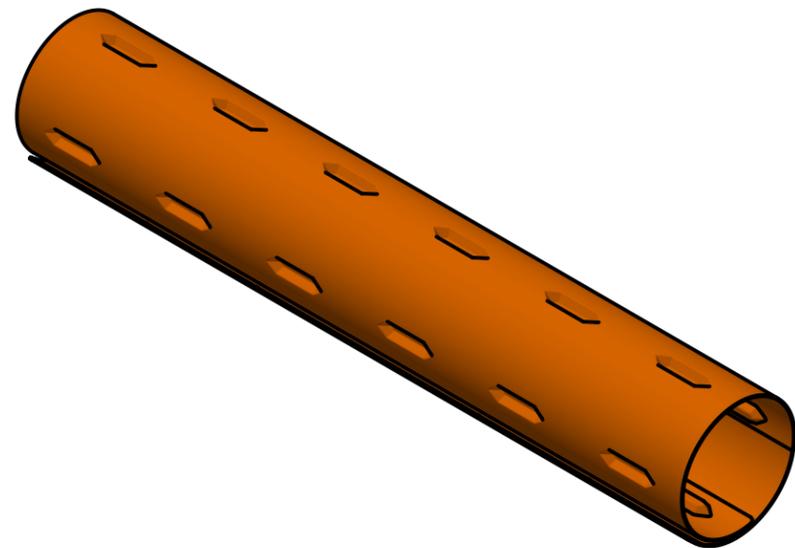
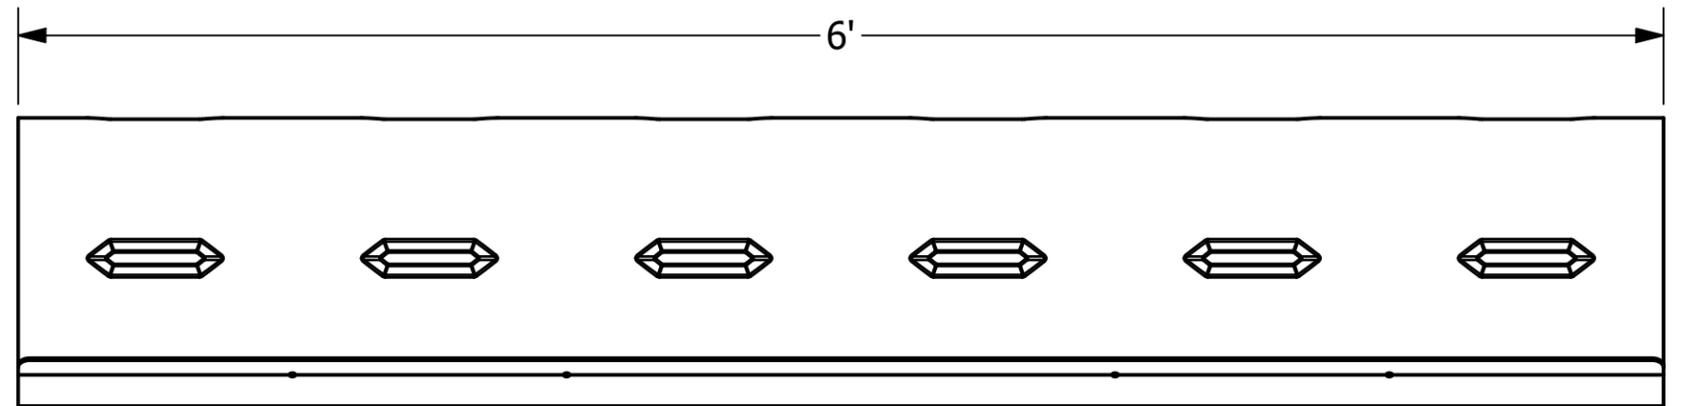


# -NOTES-

1. DESIGN TESTED TO ASTM F712 CLASS 4.
2. MAT'L: BRIGHT ORANGE ABS
3. MAX USE VOLTAGE OF 36.6 kV  
COVERED-PHASE-TO-COVERED-PHASE.
4. WEIGHT: 16 LB.

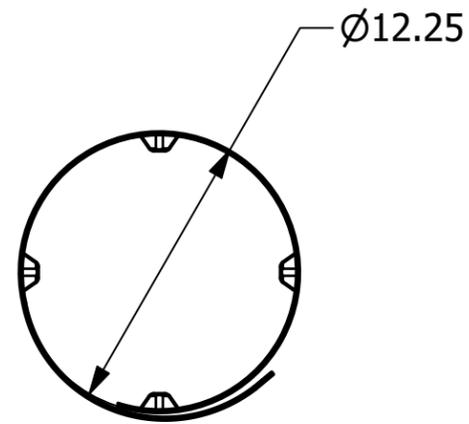

|  |  |  |  |                             |                            |
|--|--|--|--|-----------------------------|----------------------------|
| <b>CHANCE</b> <sup>®</sup>   |  |  <b>HUBBELL POWER SYSTEMS, INC.</b> |  |                             |                            |
|  |  | TITLE<br><b>ABS POLE GUARD</b>   |  |                             |                            |
| <small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small> |  | SIZE<br><b>B</b>   | CAT / PART / ASSY NO.<br><b>PSC4060704</b> | DWG NO.<br><b>SA4060704</b> | REV<br><b>A</b>            |
|  |  | <small>DO NOT SCALE THIS DRAWING</small>   | DRN BY <b>IMJ</b>                          | DATE <b>10/9/2023</b>       | SHEET <b>1</b> OF <b>1</b> |