

Utility - Single Phase Transformer Connectors for Underground Use

PSMTL - Secondary Stud Mount Transformer Connectors


- * Manufactured from high strength 6061-T6 aluminum alloy to provide premium electrical and mechanical performance
- * Dual rated for copper or aluminum conductors
- * Meets or exceeds ANSI C119.4 Class A specifications
- * Range taking design reduces inventory
- * Rated for 600 Volts



Catalog Number		Stud Size	Number of Ports	Dimensions, Inches			Wire Range KCMIL
Slip Fit	Screw-on			L	W	H	
PSMTL250-4P	PSMTL250-4SP	5/8" - 11	4	5.17	0.88	1.13	250 - #10
PSMTL250-6P	PSMTL250-6SP	5/8" - 11	6	6.90			
PSMTL250-8P	PSMTL250-8SP	5/8" - 11	8	8.62			
PSMTL350-4P	PSMTL350-4SP	5/8" - 11	4	5.55	0.88	1.25	350 - #10
PSMTL350-6P	PSMTL350-6SP	5/8" - 11	6	7.55			
PSMTL350-8P	PSMTL350-8SP	5/8" - 11	8	9.68			
PSMTL500-4P	PSMTL500-4SP	1" - 14	4	6.43	1.38 Slip Fit 1.13 Screw-on	1.63	500 - #10
PSMTL500-6P	PSMTL500-6SP	1" - 14	6	8.58			
PSMTL500-8P	PSMTL500-8SP	1" - 14	8	10.93			
PSMTL600-4P	PSMTL600-4SP	1" - 14	4	7.03	1.38 Slip Fit 1.13 Screw-on	1.63	600 - #10
PSMTL600-6P	PSMTL600-6SP	1" - 14	6	9.53			
PSMTL600-8P	PSMTL600-8SP	1" - 14	8	12.03			
PSMTL750-4P	PSMTL750-4SP	1" - 14	4	7.64	1.38 Slip Fit 1.25 Screw-on	1.75	750 - 1/0
PSMTL750-6P	PSMTL750-6SP	1" - 14	6	10.26			
PSMTL750-8P	PSMTL750-8SP	1" - 14	8	12.89			

OPTIONS:

- SC - Lock on cover (PSMTLSC Prefix)
- CC - Slip on cover (PSMTLCC Prefix)
- A - Anodized set screws
- T - Tin plated
- SL - 1/0 - #14 Streetlight outlet, adds apx. 7/8" to length
- K - Kit (two insulated and one bare)
- For omission of oxide inhibitor delete suffix "P"

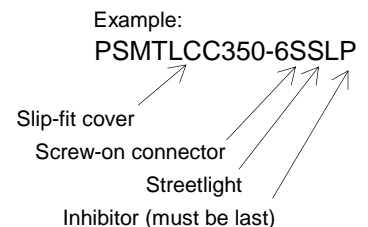

Consult factory for additional configurations not listed