


### TYPE PTT

#### Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Rated for 600 volts
- Range taking
- Clear plated
- Meets or exceeds ANSI C119.4 Class A specifications
- Stud is tin plated copper

#### Benefits

- Suitable for use with either copper or aluminum conductors
- Ensures reliability
- Reduces inventory
- Provides low contact resistance
- Industry standard
- Provides low contact resistance for connection to transformer

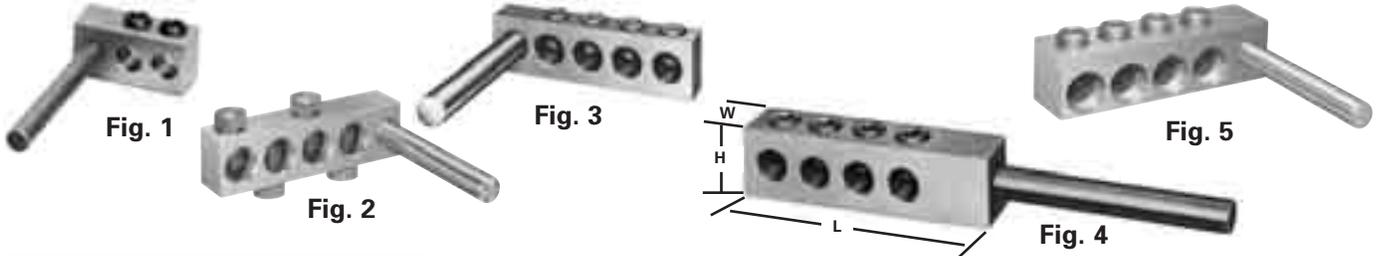

E


Catalog Number	Figure Number	No. of Ports	Wire Range	Copper Stud Diameter	Stud Length	Dimensions		
						L	H	W
PTT2-0	1	2	1/0-14	3/8	3	1-7/8	1	3/4
PTT4-0	1	4	1/0-14	3/8	3	3-1/16	1	3/4
PTT2+2-250	2	4	250kcmil-6	1/2	4	4-3/64	1-1/8	29/32
PTT2-250	3	2	250kcmil-10	1/2	4	2-11/16	1-1/8	15/16
PTT3-250	3	3	250kcmil-10	1/2	4	3-1/2	1-1/8	15/16
PTT4-250	3	4	250kcmil-10	1/2	4	4-5/16	1-1/8	15/16
PTT5-250	3	5	250kcmil-10	1/2	4	5-1/8	1-1/8	15/16
PTT6-250	3	6	250kcmil-10	1/2	4	5-15/16	1-1/8	15/16
PTT8-250	3	8	250kcmil-10	1/2	4	7-9/16	1-1/8	15/16
PTT2-350	3	2	350kcmil-10	5/8	4	3-1/4	1-1/4	1
PTT3-350	3	3	350kcmil-10	5/8	4	4-3/16	1-1/4	1
PTT4-350	3	4	350kcmil-10	5/8	4	5-1/16	1-1/4	1
PTT5-350	3	5	350kcmil-10	5/8	4	6	1-1/4	1
PTT6-350	3	6	350kcmil-10	5/8	4	6-7/8	1-1/4	1
PTT8-350	3	8	350kcmil-10	5/8	4	8-11/16	1-1/4	1
PTT4-35012	3	4	350kcmil-10	1/2	4	5-1/16	1-1/4	1
PTT6-35012	3	6	350kcmil-10	1/2	4	6-7/8	1-1/4	1
PTT2-500	3	2	500kcmil-10	3/4	4-1/2	3-5/8	1-5/8	1
PTT3-500	3	3	500kcmil-10	3/4	4-1/2	4-3/4	1-5/8	1
PTT4-500	3	4	500kcmil-10	3/4	4-1/2	5-7/8	1-5/8	1
PTT5-500	3	5	500kcmil-10	3/4	4-1/2	7	1-5/8	1
PTT6-500	3	6	500kcmil-10	3/4	4-1/2	8-1/8	1-5/8	1
PTT8-500	3	8	500kcmil-10	3/4	4-1/2	10-3/8	1-5/8	1
PTT4-750	3	4	750kcmil-1/0	3/4	5-1/2	7	1-3/4	1-3/16
PTT90-4-250	4	4	250kcmil-10	1/2	3-13/32	4-15/32	1-1/8	29/32
PTT90-6-250	4	6	250kcmil-10	1/2	3-13/32	6-3/32	1-1/8	29/32
PTT90-8-250	4	8	250kcmil-10	1/2	3-13/32	7-23/32	1-1/8	29/32
PTT4-350B	5	4	350kcmil-10	5/8	4	4-43/64	1-1/4	1-1/4
PTT6-350B	5	6	350kcmil-10	5/8	4	6-1/2	1-1/4	1-1/4

#### PTT OPTIONS:

- D - Disc Pad Screws
- 9/16H - 9/16" Hex
- B - Blind Hole
- A - Anodized Screw
- P - Inhibitor

#### Example:

**PTT4-250DAP**



Inhibitor Must be **LAST**