


--NOTES--

1. MATERIAL: 9 GA. (.15) ASTM A568 STEEL, HOT DIP GALV PER ASTM A153 LATEST REV

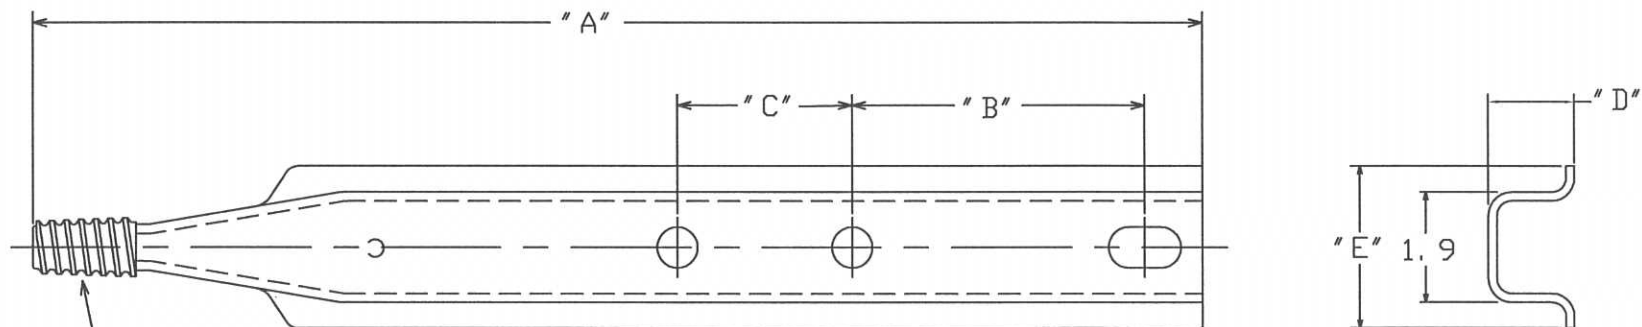

1" CONDUCTIVE NYLON THREAD
PER ANSI C135.22

CAT. NO.	"A"	"B"	"C"	"D"	"E"
2162P	15	5	--	1.3	2.6
2170P	18	5	3	1.3	2.6
C2060106P	18	8	--	1.3	2.6
2174P	20	5	3	1.3	2.6
2199P	20	8	--	1.3	2.6
C2060227P	21	5	--	1.3	2.6
2171P	24	6	2	1.5	2.6
C2060140P	24	5	3	1.5	2.6
21971P	24	5	3	2.0	2.9

<p>CHANCE TOLERANCE CHART</p>		<p>HUBBELL POWER SYSTEMS POWER SYSTEMS, INC.</p>	
<p>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</p>			
<p>TITLE NYLON THREAD POLE TOP PIN</p>		<p>SIZE DWG NO. SB SA2162P</p>	<p>CAT / PART / ASSY NO. SEE CHART</p>
<p>DO NOT SCALE THIS DRAWING</p>	<p>DRN BY WILSON</p>	<p>DATE 08/11/11</p>	<p>REV B SHEET 1 OF 1</p>