

# SG-1 Sag Gauge




## Description:

- Used to set the proper conductor sag during spacer cable installation
- Hung on the messenger at the mid-point between roll-by blocks (PBR-3-DR)
- When sagging, align the top of the cable to the slot marked with the current ambient temperature

## Benefits:

- Instant verification of proper conductor sag
- Hot stick operable
- Light weight anodized aluminum (made from aluminum 5052-H32)
- Large, easy to read lettering
- Makes installations simpler and faster

## Dimensions:

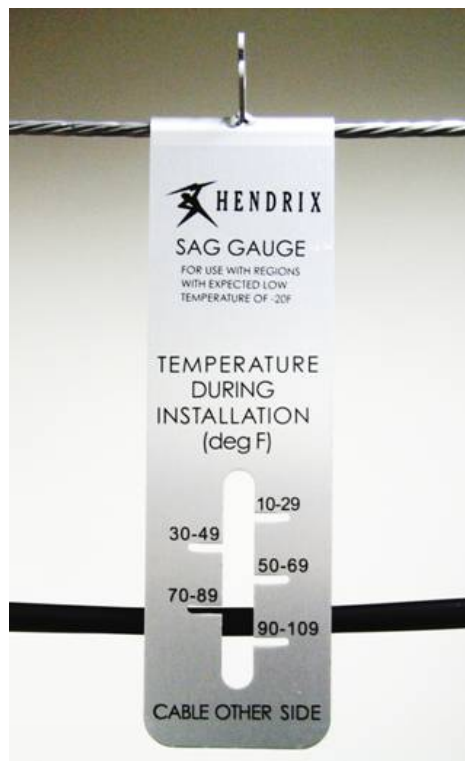

Part Number	Dimensions (in)			Weight (lbs)
	Length	Width	Thickness	
SG-1	23	6	.1875	2.5

\*SG-2 available with metric units