



109 Independence Way
Coatesville, PA 19320
P: 610-857-2655
F: 610-857-2986
graphics@uticom.net
www.uticom.net

Part# U7010-14221PA
U7000DS2

© Uticom Systems Inc. 2019
Proprietary and confidential information contained in this drawing is property of Uticom Systems Inc. and is only intended to be viewed by the end user or authorized distributor. Any reproduction in part or as a whole is strictly prohibited unless approved in writing by Uticom Systems, Inc.

Please review this drawing for accuracy. Approved by: _____ Date: _____

Black characters printed
on orange background

10"

White characters printed
on blue background


7"

! WARNING

Hazardous voltage.
Keep out!

May shock, burn or cause death.
If found unlocked, call nearest district of:

**NORTHERN VIRGINIA
ELECTRIC COOPERATIVE**



! WARNING

Underground power cables
are located in this area.


Before digging call:

"Miss Utility of VA" 1-800-552-7001

May shock, burn or cause death.



NOTICE

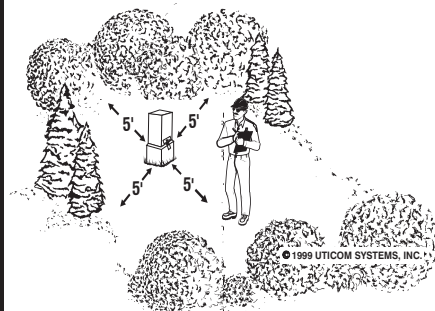

We need room to work safely on this device. Please keep shrubs and structures 5 feet away from all sides.

Obstructions may be damaged or removed during service restoration or maintenance.

▲ USI

U7010-14221PA

.25"
round
corners

U7000 DS2 Material: 0.007" retro-reflective sheeting, road sign grade with enclosed optical lens elements, engineering grade. Printed using automotive grade solvent based ink, thickness dry .0004" +/- .0001" with 30 micron emulsion, applied using a 158 mesh screen. Short term UV cured inks are not acceptable. **Overlaminates:** 0.002" UV filtering PVF over laminate. **DS2 Adhesive:** 0.002" dual surface permanent hi-tack acrylic adhesive. Designed to adhere to properly prepared painted metal and plastic surfaces, including injection molded, blow molded, rotationally molded, and fiberglass plastic surfaces.

Durability: Minimum lifetime exterior durability of 20-25 years with proper surface preparation. Defective materials will be replaced at no charge. All parts shall be date stamped with month and year of manufacture.

Compliance: NESC and ANSI Z535-2017 compliant, UL 969 certified. All pieces shall pass a UL 969 Legibility Test and UL 969 Defacement Test. Material must have a current UL file number to be approved. Uticom UL file number for U7000 material is MH48956. Uticom will monitor all applicable standards and update graphics as changes occur.

Installation: Minimum safe viewing distance is 5 feet per ANSI Z535.2-2017 Table B1.