



109 Independence Way
Coatesville, PA 19320
P: 610-857-2655
F: 610-857-2986
graphics@uticom.net
www.uticom.net

© Uticom Systems Inc. 2014
Proprietary and confidential information contained in this drawing is property of Uticom Systems Inc. and is only intended to be viewed by the end user or authorized distributor. Any reproduction in part or as a whole is strictly prohibited unless approved in writing by Uticom Systems, Inc.

Part # U7010WWN-G-11 U7000 Reflective Material Exterior Pad Mount Label

Please review this drawing for accuracy. Approved by: _____ Date: _____

black on orange background

10"

white on blue background

.625"

WARNING

.363"

Hazardous voltage inside.

.44"

KEEP OUT!

.18"

Can shock, burn or cause death.

If found damaged or unlocked call
your local utility company.



WARNING

.24"

Underground power cables
are located in this area.



.26"

Before digging call 811.




.21"

Can shock, burn or cause death.

NOTICE

.875"

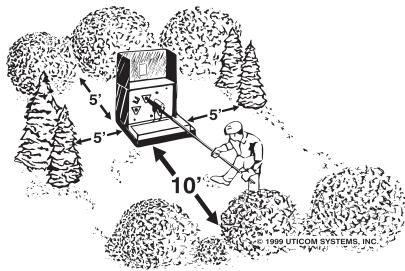

7"

.173"

We need room to work safely on
this device. Please keep shrubs
and structures 10 feet away from
the side with doors and 5 feet
from other sides.

Obstructions may be damaged
or removed during service
restoration or maintenance.

▲ USI U7010WWN-G-11

All other graphics print black on white.

1/4" round corners

U7000 Material: 0.007" retro-reflective sheeting, road sign grade with enclosed optical lens elements, engineering grade. Printed using automotive grade solvent based ink, thickness dry .0004" +/- .0001" with 30 micron emulsion, applied using a 158 mesh screen. Short term UV cured inks are not acceptable. **Over laminate:** 0.002" UV filtering over laminate. **Adhesive:** 0.0015" solvent based, permanent acrylic ASTM grade D 4956 Class 1 with .007" protective liner, kraft coated one side, with back slit. After 72 hours non removable intact. Water based adhesives or film liners are not acceptable in any part of this construction.

Durability: Minimum lifetime exterior durability of 20-25 years with proper surface preparation. Defective materials will be replaced at no charge.

Compliance: NESC and ANSI Z535-2011 compliant, UL 969 certified. All pieces shall pass a UL 969 Legibility Test and UL 969 Defacement Test. Material must have a current UL file number to be approved. Uticom UL file number for U7000 material is MH48956. Uticom will monitor all applicable standards and update graphics as changes occur.

Installation: Minimum safe viewing distance is 5 feet per ANSI Z535.2-2011 Table B1.