

Project		Catalog #		Type	
Prepared by		Notes		Date	



Interactive Menu

- Ordering Information [page 2](#)
- Mounting Details [page 3](#)
- Energy and Performance Data [page 4](#)

Product Specifications

Optics

- The LED chamber incorporates a vacuum metalized reflector that provides high-efficiency illumination.
- Optics are precisely designed to shape the NEMA type 6H x 6V wide distribution and 3H x 3V spot distribution, maximizing efficiency and application spacing.
- Clear glass tempered lens with full circumference form-in-place silicone gasket protects the optics from damage.
- Various CCTs available, offered in 2200K, 2700K, 3000K, 4000K, 5000K, or 5700K and minimum 70 CRI.

Electrical


- LED driver is mounted to the removable die-cast aluminum door for optimal heat sinking and ease of maintenance.
- 120-277V, 240-480V, 347V, and 480V; 50/60Hz
- Standard 0-10V dimming
- Integral 6kV surge is standard. 10kV surge protection options with series or parallel configurations
- -40°C to 40°C ambient temperature operating range. Optional 50°C HA (high ambient) available.

Physical Characteristics


- Heavy-duty, die cast aluminum housing, driver compartment and driver door.
- A separate driver compartment and external fins provide optimal thermal management that result in longer LED and driver life.
- Access to the driver for maintenance is achieved with a removable driver door using pan head screws.
- A one-piece silicone gasket seals the door to the fixture housing.

Dimensional Details


Slipfitter Mount

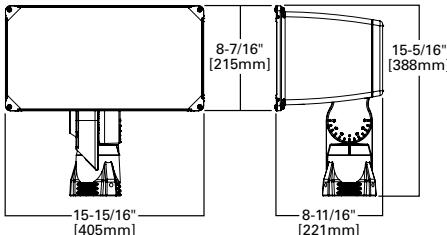

Trunnion Mount

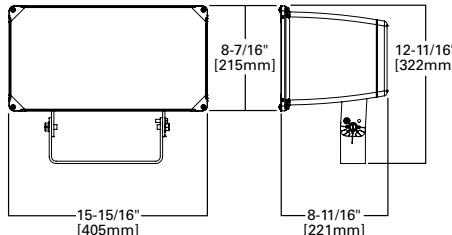

Yoke Mount

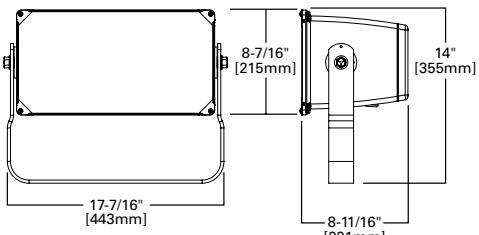

Streetworks

Utility Flood Medium

Floodlight & Sign Lighting Luminaire

Product Certifications & Features



Certified by DarkSky.org

Compliance

- The housing, optical chamber and driver compartment are IP66 rated.
- Meets ANSI C136.31 for 3G luminaire vibration. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Suitable for mounting within 4' (1.2m) of the ground.
- BAA domestic preference option meets BAA requirements. See [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information
- FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Cooper's products with a BAA designation are manufactured in the US and utilize a BAA COTS exemption rule for compliance. To verify a configured product with specific accessories and options meet BABA Domestic Preference Requirements; submit this catalog number to Cooper Lighting Quotation team for validation by our Engineering and Manufacturing teams. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Shipping Data

- Approximate net weight: 20 lbs. (9.09 kgs.)
- EPA: 1.25 sq. ft.

Warranty

- Five-year limited warranty. Consult website for details. www.cooperlighting.com/legal

Ordering Information

SAMPLE ORDER NUMBER: UFLD-CA2-180-740-U-66-C-BK-10K-PR7


Product Family	Configuration	Wattage Bucket	Color Temperature	Voltage	Distribution	Mounting	Color
UFLD =Utility Flood Medium BAA-UFLD =Utility Flood Medium Buy American Act Compliant ¹⁵ TAA-UFLD =Utility Flood Medium Trade Agreements Act Compliant ¹⁶ BABA-UFLD =Utility Flood Medium Build America Buy America Act Compliant ¹⁷	CA2=2 LED	80=80W 90=90W 120=120W 130=130W 140=140W 150=150W 180=180W	740=70CRI, 4000K 727=70CRI, 2700K ² 722=70CRI, 2200K ² 730=70CRI, 3000K ² 750=70CRI, 5000K ² 760=70CRI, 5700K ²	U=Universal (120-277V) 8=480V ¹ 9=347V	66=NEMA 6H x 6V Wide ¹⁴ 33=NEMA 3H x 3V Spot ¹³	C=Slipfitter, 2-3/8"-3" O.D. (SO cord through housing) S=Slipfitter, 2-3/8" - 3" O.D. (Leads through slipfitter) T=Trunnion Y=Yoke	BK=Black BZ=Bronze AP=Grey WH=White
Options (Add as Suffix)							
		Controls			Accessories (Order Separately)¹⁸		
10K =Series 10kV UL 1449 Surge Protective Device 20K =Series 20kV UL 1449 Surge Protective Device 20KI =Series 20kV UL 1449 Surge Protective Device with light indicator 10MSP =Parallel 10kV MOV Surge Protection Device 20MSP =Parallel 20kV MOV Surge Protection Device HA =50°C High Ambient Temperature ³ D10=<10% Dimming CXXX =Cord Type ¹¹ FADC =Field Adjustable Dimming Controller ¹² Dxxxxx =DOT Configuration - Contact Quotes Team Uxxxxx =Utility Configuration - Contact Quotes Team		PR =NEMA 3-PIN Photocontrol Receptacle PR7 =NEMA 7-PIN Twistlock Photocontrol Receptacle MSP/DIM-L12 =Integrated Occupancy Sensor for Dimming Operation, 8'-12' Mounting Height ^{4,5} MSP/DIM-L30 =Integrated Occupancy Sensor for Dimming Operation, 12'-30' Mounting Height ^{4,5} MSP-L12 =Integrated Occupancy Sensor for ON/OFF Operation, 8'-12' Mounting Height ^{4,5} MSP-L30 =Integrated Occupancy Sensor for ON/OFF Operation, 12'-30' Mounting Height ^{4,5}			FA63 =3" O.D. Surface Mount Bracket ⁷ OA1223 =10kV/10kA UL 1449 Surge Protective Device Replacement OA/RA1013 =Photocontrol Shorting Cap OA/RA1014 =NEMA Photocontrol - 120V OA/RA1016 =NEMA Photocontrol - Multi-Tap OA/RA1027 =NEMA Photocontrol - 480V OA/RA1201 =NEMA Photocontrol - 347V RAB-XX =Right Angle Pipe Bracket for Slipfitter SAB-XX =Steel Angle Bracket for Trunnion TYS-XX =Slipfitter Adapter for 2-3/8", 3" or 3-1/2" O.D. Tenon ⁸ TS2/UFLD-XX =Top and Side Visors ⁹ VS/UFLD =Vandal Shield ⁹ WG/UFLD =Wire Guard ⁹ ISHH-01 =Integrated Sensor Programming Remote LLPC =Long-life Photocontrol ¹⁰ LLPC-FO =Long-life Photocontrol (Fail-Off)		

NOTES:


- Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems)
- Extended lead times apply. Use dedicated IES files for 3000K, 5000K, and 5700K when performing layouts. These files are published on the UFLD luminaire product page on the website.
- Not available with 3H x 3V spot distribution.
- Integrated sensor option only available in slipfitter mounting.
- Not available with Photocontrol.
- Replace XX with color designation. Additional brackets and adaptors available on the poles product page on the website.
- Not available with tenon mount.
- Not available with slipfitter mount.
- Cannot combine TS2 (Top and Side Visor), VS (Vandal Shield), or WG (Wire Guard), limited to one external guard per fixture.
- Sold as accessory. Not covered under luminaire warranty.
- 3-conductor cord available in 12, 14, and 16 gauge with lengths of 5, 8, 10, 15, 20, and 25 feet. Specify cord gauge with the first 2 digits and cord length with the last 2 digits (ex: C1605 = 16-gauge, 5 feet length cord). Standard cord is 16-gauge with length of 3.5 ft if not specified.
- Cannot be used with PR7 or other motion response control options.
- Only available in 90W and 140W.
- Available in 80W, 120W, 130W, 150W, and 180W wattage buckets.
- Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
- Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
- Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Mounting Details


Drilling Patterns

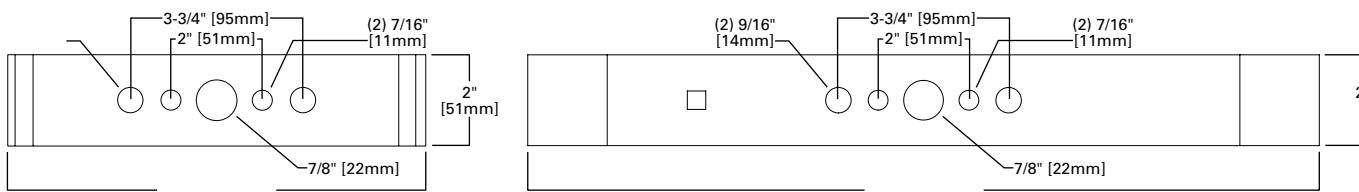

Optional Integrated Sensor

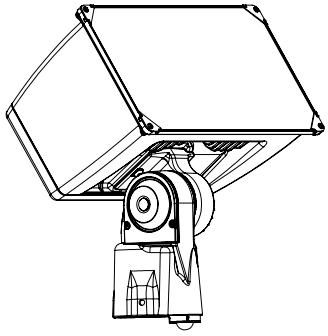

Accessories

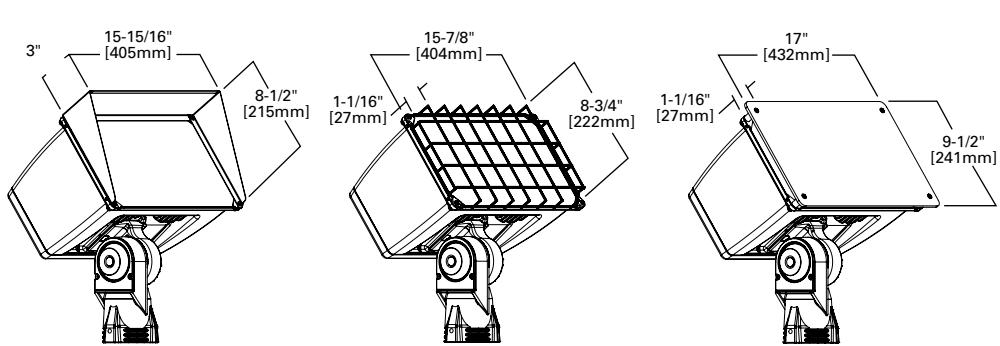

Energy and Performance Data

6x6						
Distribution	ANSI Wattage	80	120	130	150	180
Wattage	82	124	133	151	183	
2200K	9,619	15,672	16,575	18,369	21,054	
Lumens Per Watt	117	127	125	121	115	
2700K	9,994	16,284	17,222	19,086	21,875	
Lumens Per Watt	122	131	130	126	120	
3000K	11,588	18,882	19,970	22,131	25,365	
Lumens Per Watt	141	161	151	146	139	
4000K	11,802	19,230	20,338	22,539	25,833	
Lumens Per Watt	144	155	153	149	141	
5000K	12,018	19,583	20,711	22,952	26,307	
Lumens Per Watt	146	158	156	152	144	
5700K	11,764	19,168	20,272	22,466	25,749	
Lumens Per Watt	143	155	153	149	141	

3x3			
Distribution	ANSI Wattage	90	140
Wattage	90	137	
2200K	9,551	13,830	
Lumens Per Watt	107	101	
2700K	9,924	14,370	
Lumens Per Watt	111	105	
3000K	11,505	16,660	
Lumens Per Watt	129	122	
4000K	11,719	16,970	
Lumens Per Watt	131	124	
5000K	11,928	17,272	
Lumens Per Watt	133	126	
5700K	11,681	16,915	
Lumens Per Watt	131	124	

Current Draw

Voltage	Model Series						
	6 x 6	6 x 6	6 x 6	6 x 6	6 x 6	3x3	3x3
	80W	120W	130W	150W	180W	90W	140W
Voltage	Current (A)	Current (A)	Current (A)	Current (A)	Current (A)	Current (A)	Current (A)
120V	0.688	1.07	1.11	1.26	1.53	0.748	1.14
277V	0.31	0.47	0.5	0.54	0.67	0.33	0.51
347V	0.26	0.38	0.4	0.44	0.56	0.28	0.42
480V	0.19	0.29	0.31	0.33	0.4	0.21	0.31

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
10°C	1.03
15°C	1.02
25°C	1.00
40°C	0.97
50°C	0.96

FADC Settings

FADC Position	Percent of Typical Lumen Output
1	25%
2	48%
3	56%
4	65%
5	75%
6	80%
7	85%
8	90%
9	95%
10	100%

NOTES: +/-5% typical value