




109 Independence Way
 Coatesville, PA 19320
 P: 610-857-2655
 F: 610-857-2986
 graphics@uticom.net
 www.uticom.net

Part # UTISM-10
 10 position UtiCarrier
 U2200 Lexan Material
 100/pkg

© Uticom Systems Inc. 2012
 Proprietary and confidential information contained in this drawing is property of Uticom Systems Inc. and is only intended to be viewed by the end user or authorized distributor. Any reproduction in part or as a whole is strictly prohibited unless approved in writing by Uticom Systems, Inc.

Please review this drawing for accuracy. Approved by: _____ Date: _____

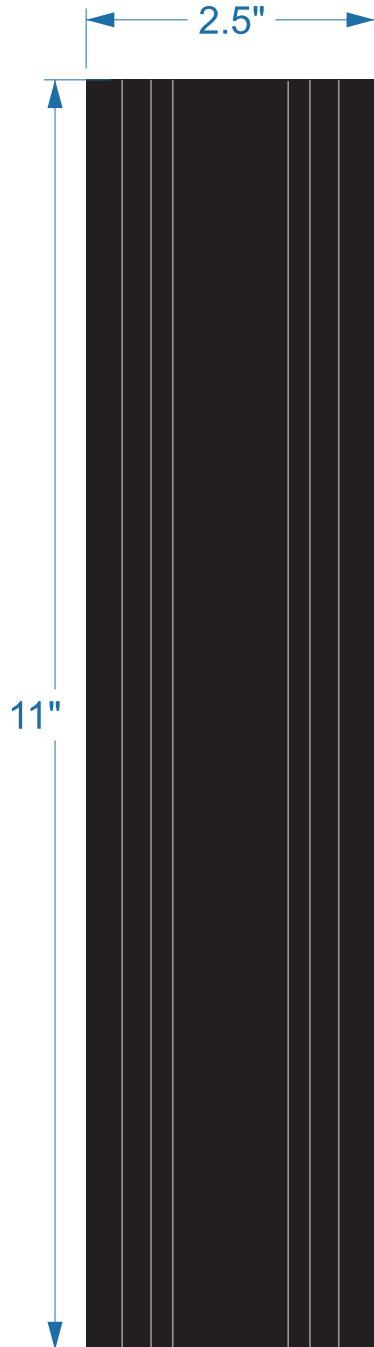

Part # UTISM-10
 11" tall x 2.5" wide UtiCarrier
 100 per package

U9200 Material: 1/16" torlinated poly (amide-imide) polycarbonate plastic with black carbon type 5 UV inhibitors.

**UNASSEMBLED - DIGITS ONLY:
 Part # U101077BYEG-legend**



1" x 1" adhesive backed digits
 Yellow character on black background

U6000 Material: 0.007" retro-reflective sheeting, road sign grade with enclosed optical lens elements, engineering grade. Printed using automotive grade solvent based ink, thickness dry .0004" +/- .0001" with 30 micron emulsion, applied using a 158 mesh screen. Short term UV cured inks are not acceptable.

Adhesive: 0.0015" solvent based, permanent acrylic ASTM grade D 4956 Class 1. After 72 hours non removable intact. Water based adhesives are not acceptable in any part of this construction.

Durability: Minimum lifetime exterior durability of 20-25 years with proper surface preparation. Defective materials will be replaced at no charge.

Drawing shown is not 1:1