


Compression Splice VERSAtile™ Minimum Tension

By ANDERSON
Catalog # [VACS250](#)

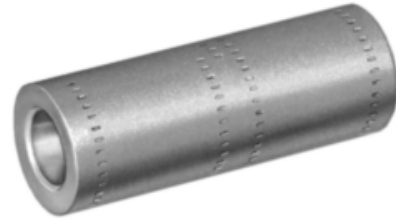

Minimum Tension versatile Compression Splice for 250 MCM
AL/CU

*Representative Image

Features

- For AL to AL, AL to CU connections
- AL9CU (90°C Rated)
- UL Listed
- CSA Certified

General

Color Code	Red
Compression Method	VersaCrimp or Conventional Die Tooling
Die Size	*See Resources / Downloads for die selection and installation instructions
EU RoHS Indicator	Contact Manufacturer
Material	Aluminum Alloy
UPC	096359334378

Dimensions

Diameter - Inside	0.605 in
Weight	0.196 lb

Conductor Related

Conductor Compatibility	ACSR-Quail-2/0-6/1;ACSR-Pigeon-3/0-6/1;ACSR-Penguin-4/0-6/1;AAC-Aster-2/0-7;AAC-Phlox-3/0-7;AAC-Oxlip-4/0-7;AAC-Valerian-250-19;AAAC 6201 Alloy-Anaheim-155.4-6/18;AAAC 6201 Alloy-Amherst-195.7-6/18;AAAC 6201 Alloy-Alliance-246.9-6/18
-------------------------	---

Certifications and Compliance

UL Listed	Yes
-----------	-----

Logistics

Carton Quantity	60
-----------------	----

Product Assets

[Catalogs - Distribution Connectors \(CA05127E\)](#)
[Installation Manuals - VACS Splice Installation Instructions](#)
[Sales Drawings - VACS_sales_drawing](#)