




# YCS361R, Aluminum Sleeve, Staked Cable Stop

By Burndy  
Catalog # YCS361R

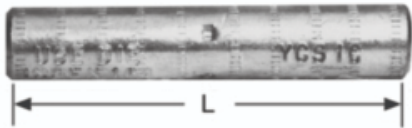

HYSPLICE AL sleeve with staked cable stop, designed to withstand jumper loop tensile and vibration stresses. ANSI C119.4 CLASS 2 (PARTIAL TENSION), Index: 327.

## Application

For ACSR, All Aluminum, 6201, 5005 And Compressed Conductors

## General

Catalog Number	YCS361R
Connector Type	Splice
Die Index	327
EU RoHS Indicator	Contact Manufacturer
Material	Aluminum
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	HYSPLICE
Trade Name	HYSPLICE™
Type	YCS-R
UPC	781810820575
UPC 12 Digit	7818108205755

## Dimensions

Dimension - B Length fraction	4-3/50 in
Dimension - B Length inch	4.06 in
Dimension - L Length Overall mm	210 mm
Dimension - Length Overall inch	8.25 in
Dimension - Outside Diameter inch	1.3 in

## Conductor Related

Conductor - ACSR Str Size	477.0 (18/1) Pelican kcmil
Conductor - ACSR Str Size Range	477.0 (18/1) Pelican kcmil
Conductor - AL Str Size	477 kcmil (18/1)
Conductor - AL Str Size Range	477 kcmil

## Certifications And Compliance

Buy American Compliant	Contact Manufacturer
Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance	CM
Status	
UL Listed	No

## Logistics

Carton Quantity	25
Minimum Pack Quantity	25
Pallet Quantity	3600

## Product Assets

[Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)  
[Catalogs - BURNDY Master Catalog - Section H - Overhead Distribution](#)  
[Customer Notices - Prop 65 Notice](#)  
[Interactive Catalog - BURNDY Full-Line Digital Catalog](#)  
[Product Cross Section Image\(s\) - BUR\\_YCS-R\\_LineArt](#)  
[Sales Drawings - 50115707](#)  
[Specifications - YCS361R](#)