

Type: ACF

[Download Install Guide](#)


Straight Bolted Cable Main to Flat Pad Tap

Aluminum alloy tee for aluminum cable to flatbar pads.

NEMA hole drilling is standard. Clamping bolts have hex-stops for one-wrench installation. Contact sealant is recommended.

Also available for two cables to flat bar

Example: ACF2-13-2B

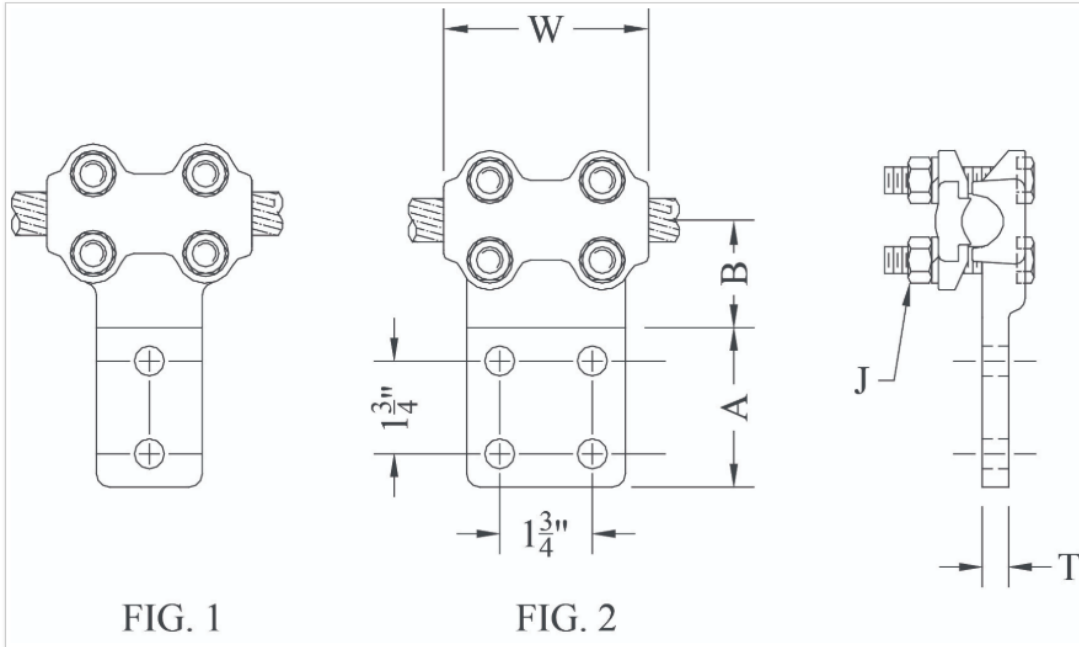

[Print This Page](#)

[Download As PDF](#)

Catalog Number	Fig. No.	Cable Size (AAC)	Cable Size (ACSR)	Pad Width (in)	A (in)	B (in)	W (in)	T (in)	J (in)	Weight (lb)
----------------	----------	------------------	-------------------	----------------	--------	--------	--------	--------	--------	-------------

ACF-39-4A	2	874-1300 MCM	715-1113 MCM	3	3	2 1/4	4 1/4	5/8	1/2	2.10
-----------	---	--------------	--------------	---	---	-------	-------	-----	-----	------