
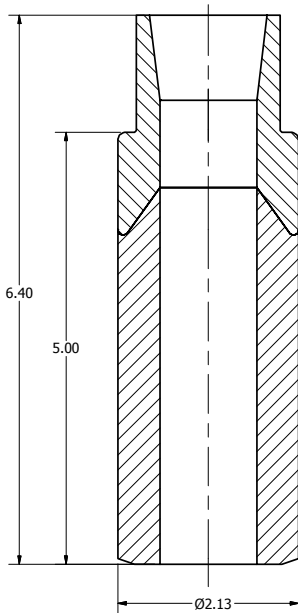


HUBBELL
Power Systems, Inc.

1850 Richland Ave East
Aiken, SC 29801
Phone: 803-648-8386
www.Hubbellpowersystems.com

15, 25/28 kV
CABLE ADAPTER

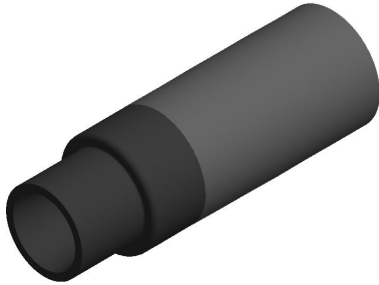

CATALOG NUMBER	INSULATING RANGE	
	INCH	METRIC
625CAE	.530 - .675	13.5 - 17.3
625CAF	.640 - .820	16.3 - 20.8
625CAG	.760 - .950	19.3 - 24.1
625CAH	.850 - 1.050	21.6 - 26.7
625CAJ	.980 - 1.180	24.9 - 30.0
625CAK	1.090 - 1.310	27.7 - 33.3
625CAL	1.180 - 1.465	30.0 - 37.2
625CALM	1.280 - 1.430	32.5 - 36.3
625CAM	1.370 - 1.630	34.8 - 41.4
625CAN	1.515 - 1.780	38.5 - 45.2
625CAP	1.725 - 1.935	43.8 - 49.1

Cable adapters are used in all T-body kits, including LRTP and ETP kits. Made with high quality EPDM rubber and provides stress relief for terminated cables. To select the proper cable adapter, determine the cable insulation diameter and reference the above chart.

<p>CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS, INC. NO REPRODUCTION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS, INC. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</p>				<p>HUBBELL POWER SYSTEMS, Inc.</p>			
		<p>TITLE</p> <p>CABLE ADAPTER 600 AMP, 25 KV</p>				<p>CAT / PART / ASSY NO. 625CA</p>	
REV DATE	SIZE	DWG NO.	DO NOT SCALE THIS DRAWING	DRN BY	DATE	DATE	REV
1/2/2017	SB	---		JVR	9/8/2006		1
				SHEET 1 OF 1			