
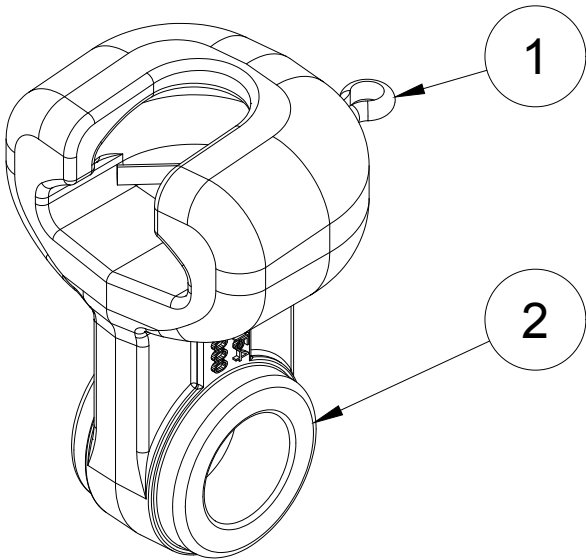
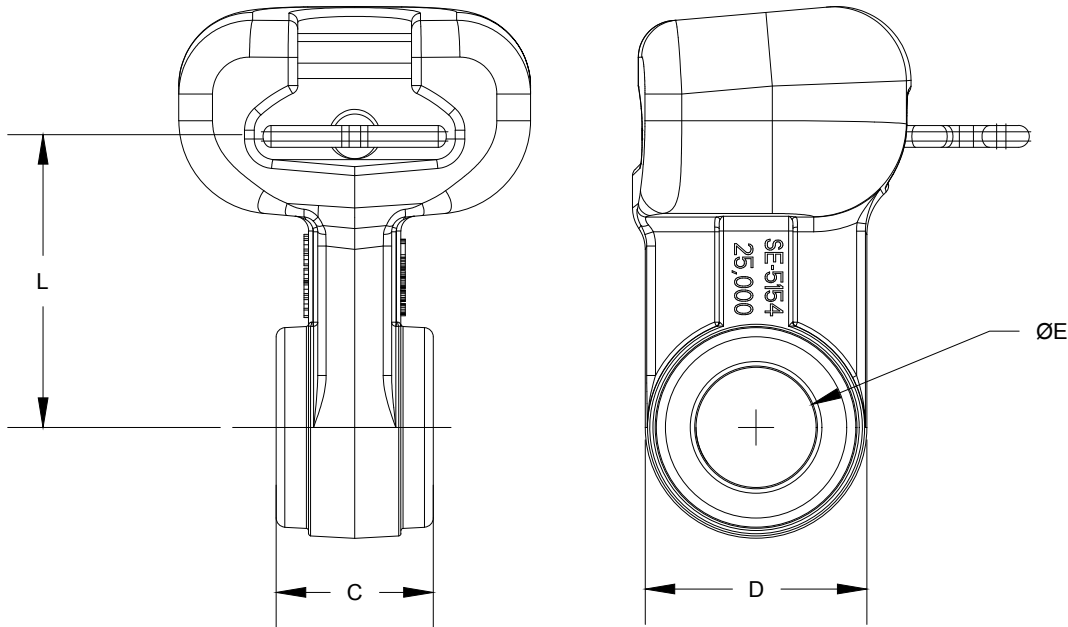


SOCKET EYE

NOTES:
1. MATERIAL:
BODY - DUCTILE IRON, HOT DIPPED GALVANIZED
COTTER PIN - STAINLESS STEEL

BILL OF MATERIAL			
SYM		DESCRIPTION	QTY
1	-	COTTER PIN	1
2	-	SOCKET EYE	1



ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY PER
FACTORY TOLERANCES. CONTACT PLP FOR MORE INFORMATION

SOCKET EYE

CATALOG NUMBER	GENERAL DIMENSIONS inches / (mm)				ULTIMATE STRENGTH lbf / (kN)	WT. PER 100 UNITS lbs / (kg)	FOR USE WITH INSULATORS ANSI CLASS SPEC C-29.2-71
	C	D	E	L			
SE-5150	1/2 (12.7)	1-3/4 (44.5)	11/16 (17.5)	2-5/16 (58.8)	15,000 (67)	165 (75)	52-3 & 52-5
SE-5152	3/4 (19.1)	1-3/4 (44.5)	11/16 (17.5)	2-5/16 (58.8)	25,000 (111)	165 (75)	
SE-5154	1-1/16 (26.9)	1-3/4 (44.5)	13/16 (20.6)	2-5/16 (58.8)	25,000 (111)	178 (81)	
SE-5155	2-1/8 (54.0)	1-3/4 (44.5)	13/16 (20.6)	2-5/16 (58.8)	30,000 (133)	178 (81)	
SE-5156	1 (25.4)	1-1/2 (38.1)	11/16 (17.5)	1-15/16 (49.0)	25,000 (111)	144 (65)	
SE-5157	1-1/8 (28.6)	1-3/4 (44.5)	11/16 (17.5)	2-1/16 (52.3)	30,000 (133)	168 (76)	
SE-5158	3-1/4 (82.6)	2 (50.8)	25/32 (19.8)	2-29/32 (73.9)	50,000 (222)	438 (199)	52-8 & 52-11
SE-9016	2-1/4 (57.2)	2 (50.8)	13/16 (20.6)	2-3/16 (56)	50,000 (222)	339 (154)	
SE-9002	1-1/2 (38.1)	2 (50.8)	25/32 (19.8)	2-3/16 (56)	50,000 (222)	297 (135)	
SE-9020	5/8 (15.9)	1-25/32 (45)	11/16 (17.5)	1-11/16 (43)	30,000 (133)	145 (66)	52-3 & 52-5
SE-9021	3/4 (19.1)	1-25/32 (45)	11/16 (17.5)	1-11/16 (43)	30,000 (133)	151 (68.5)	
SE-9022	1-1/4 (31.8)	1-25/32 (45)	11/16 (17.5)	1-11/16 (43)	30,000 (133)	176 (80)	
SE-9023	1-3/4 (44.5)	1-25/32 (45)	11/16 (17.5)	1-11/16 (43)	30,000 (133)	201 (91)	
SE-9024	2-1/4 (57.2)	1-25/32 (45)	11/16 (17.5)	1-11/16 (43)	30,000 (133)	224 (102)	

ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY PER
FACTORY TOLERANCES. CONTACT PLP FOR MORE INFORMATION